

DIMENSIONS OF RING-JOINT FACINGS




Tolerances	
E _(depth)	+0.016 -0
F _(width)	±0.008
P _(pitch diam)	±0.005
R _(radius at bottom)	Max
23° _(angle)	±1/2°

Nominal Pipe Size							Groove Dimensions					Diameter of Raised Portion K					
150 PSI	300 PSI	400 PSI	600 PSI	900 PSI	1500 PSI	2500 PSI	Groove #	Pitch Dia	Depth	Width	Radius at Bottom	150 PSI	300 400 600 PSI	900 PSI	1500 PSI	2500 PSI	Depth
								P	E	F	R						E
.....	1/2	1/2	R11	1-11/32	7/32	9/32	1/32	2	7/32
.....	1/2	12	1-9/16	1/4	11/32	1/32	2-3/8	2-3/8	1/4
.....	3/4	3/4	1/2	13	1-11/16	1/4	11/32	1/32	2-1/2	2-9/16	1/4
.....	3/4	14	1-3/4	1/4	11/32	1/32	2-5/8	2-5/8	1/4
1	15	1-7/8	1/4	11/32	1/32	2-1/2	1/4
.....	1	1	1	3/4	16	2	1/4	11/32	1/32	2-3/4	2-13/16	2-13/16	2-7/8	1/4
1-1/4	17	2-1/4	1/4	11/32	1/32	2-7/8	1/4
.....	1-1/4	1-1/4	1-1/4	1	18	2-3/8	1/4	11/32	1/32	3-1/8	3-3/16	3-3/16	3-1/4	1/4
1-1/2	19	2-9/16	1/4	11/32	1/32	3-1/4	1/4
.....	1-1/2	1-1/2	1-1/2	20	2-11/16	1/4	11/32	1/32	3-9/16	3-5/8	3-5/8	1/4
.....	1-1/4	21	2-27/32	5/16	15/32	1/32	4	5/16
.....	22	3-1/4	1/4	11/32	1/32	4	1/4
.....	2	2	1-1/2	23	3-1/4	5/16	15/32	1/32	4-1/4	4-1/2	5/16
.....	2	24	3-3/4	5/16	15/32	1/32	4-7/8	4-7/8	5/16
2-1/2	25	4	1/4	11/32	1/32	4-3/4	1/4
.....	2-1/2	2-1/2	2	26	4	5/16	15/32	1/32	5	5-1/4	5/16
.....	2-1/2	27	4-1/4	5/16	15/32	1/32	5-3/8	5/16
.....	2-1/2	28	4-3/8	3/8	17/32	1/16	5-7/8	3/8
3	29	4-1/2	1/4	11/32	1/32	5-1/4	1/4
.....	30	4-5/8	5/16	15/32	1/32	5/16
.....	3	3	3	31	4-7/8	5/16	15/32	1/32	5-3/4	6-1/8	5/16
.....	3	32	5	3/8	17/32	1/16	6-5/8	3/8
3-1/2	33	5-3/16	1/4	11/32	1/32	6-1/16	1/4
.....	3-1/2	3-1/2	34	5-3/16	5/16	15/32	1/32	6-1/4	5/16
.....	3	35	5-3/8	5/16	15/32	1/32	6-5/8	5/16
4	36	5-7/8	1/4	11/32	1/32	6-3/4	1/4
.....	4	4	4	4	37	5-7/8	5/16	15/32	1/32	6-7/8	7-1/8	5/16
.....	4	38	6-3/16	7/16	21/32	1/16	8	7/16
.....	4	39	6-3/8	5/16	15/32	1/32	7-5/8	5/16
5	40	6-3/4	1/4	11/32	1/32	7-5/8	1/4
.....	5	5	5	5	41	7-1/8	5/16	15/32	1/32	8-1/4	8-1/2	5/16
.....	5	42	7-1/2	1/2	25/32	1/16	9-1/2	1/2
6	43	7-5/8	1/4	11/32	1/32	8-5/8	1/4
.....	5	44	7-5/8	5/16	15/32	1/32	9	5/16
.....	6	6	6	6	45	8-5/16	5/16	15/32	1/32	9-1/2	9-1/2	5/16

Dimensions in inches. RF height matches depth of groove.

DIMENSIONS OF RING-JOINT FACINGS

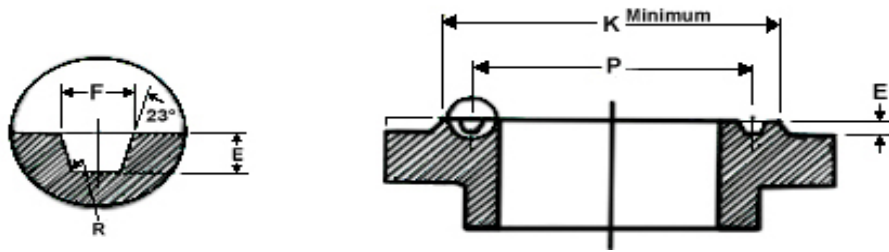

Nominal Pipe Size							Groove Dimensions				Diameter of Raised Portion K								
150 PSI	300 PSI	400 PSI	600 PSI	900 PSI	1500 PSI	2500 PSI	Groove #	Pitch Dia	Depth	Width	Radius at Bottom	150 PSI	300 PSI	400 PSI	900 PSI	1500 PSI	2500 PSI	Depth	
								P	E	F	R							E	
					6		R46	8-5/16	3/8	17/32	1/16					9-3/4		3/8	
						6	47	9	1/2	25/32	1/16						11	1/2	
8							48	9-3/4	1/4	11/32	1/32	10-3/4						1/4	
	8	8	8	8			49	10-5/8	5/16	15/32	1/32		11-7/8	12-1/8				5/16	
					8		50	10-5/8	7/16	21/32	1/16					12-1/2		7/16	
						8	51	11	9/16	29/32	1/16							13-3/8	9/16
10							52	12	1/4	11/32	1/32	13						1/4	
	10	10	10	10			53	12-3/4	5/16	15/32	1/32		14	14-1/4				5/16	
					10		54	12-3/4	7/16	21/32	1/16					14-5/8		7/16	
						10	55	13-1/2	11/16	1-3/16	3/32						16-3/4	11/16	
12							56	15	1/4	11/32	1/32	16						1/4	
	12	12	12	12			57	15	5/16	15/32	1/32		16-1/4	16-1/2				5/16	
					12		58	15	9/16	29/32	1/16					17-1/4		9/16	
14							59	15-5/8	1/4	11/32	1/32	16-3/4						1/4	
						12	60	16	11/16	1-5/16	3/32						19-1/2	11/16	
	14	14	14				61	16-1/2	5/16	15/32	1/32		18					5/16	
				14			62	16-1/2	7/16	21/32	1/16			18-3/8				7/16	
					14		63	16-1/2	5/8	1-1/16	3/32				19-1/4			5/8	
16							64	17-7/8	1/4	11/32	1/32	19						1/4	
	16	16	16				65	18-1/2	5/16	15/32	1/32		20					5/16	
				16			66	18-1/2	7/16	21/32	1/16				20-5/8			7/16	
					16		67	18-1/2	11/16	1-3/16	3/32					21-1/2		11/16	
18							68	20-3/8	1/4	11/32	1/32	21-1/2						1/4	
	18	18	18				69	21	5/16	15/32	1/32		22-5/8					5/16	
				18			70	21	1/2	25/32	1/16				23-3/8			1/2	
					18		71	21	11/16	1-3/16	3/32					24-1/8		11/16	
20		20					72	22	1/4	11/33	1/32	23-1/2						1/4	
	20		20				73	23	3/8	17/32	1/16		25					3/8	
				20			74	23	1/2	25/32	1/16				25-1/2			1/2	
					20		75	23	11/16	1-5/16	3/32					26-1/2		11/16	
24							76	26-1/2	1/4	11/32	1/32	28						1/4	
	24	24	24				77	27-1/4	7/16	21/32	1/16		29-1/2					7/16	
				24			78	27-1/4	5/8	1-1/16	3/32				30-3/8			5/8	
					24		79	27-1/4	13/16	17/16	3/32					31-1/4		13/16	

Dimensions in inches. Raised face height matches depth of groove.


Dimensional Tolerances B16.5 - 2003

Threaded, Socket-Welding, Slip-On, Lap Joint, and Blind		
Outside Diameter (1)	when the O.D. is 24" or less	±1/16"
	when the O.D. is over 24"	±1/8"
Inside Diameter	Threaded	within limites on boring gauge
	Socket-Welding, Slip-On and Lap-Joint	≤ 10"+1/32", -0" ≥ 12"+1/16", -0"
Outside Diameter of Hub (1)	≤ 12"	+3/32" -1/16"
	≥ 14"	±1/8"
Diameter of Contact Face	1/16" Raised Face	±1/32"
	1/4" Raised Face Tongue & Groove Male, Female	±1/64"
Diameter of Counterbore	Same as for Inside Diameter	
Drilling	Bolt Circle	±1/16"
	Bolt Hole Spacing	±1/32"
	Concentricity of Bolt Circle with Respect to Facing	NPS ≤ 2 1/2"
NPS ≥ 3"		1/16" max
Thickness	≤ 18"	+1/8", -0"
	≥ 20"	+3/16", -0"
Length Through the Hub (1)	≤ 18"	+1/8", -1/32"
	≥ 20"	+3/16", -1/16"


Weld Neck		
Outside Diameter (1)	when the O.D. is 24" or less	±1/16"
	when the O.D. is over 24"	±1/8"
Inside Diameter	≤ 10"	±1/32"
	12" through 18"	±1/16"
	≥ 20"	+1/8" -1/16"
Diameter of Contact Face	1/16" Raised Face	±1/32"
	1/4" Raised Face Tongue & Groove Male, Female	±1/64"
Diameter of Hub at Base (1)	when Hub Base is 24" or less	+1/16"
	when Hub Base is over 24"	±1/8"
Diameter of Hub at Point of Welding	NPS ≤ 5"	+3/32" -1/32"
	NPS ≥ 6"	+5/32" -1/32"
Drilling	Bolt Circle	±1/16"
	Bolt Hole Spacing	±1/32"
	Concentricity of Bolt Circle with Respect to Facing	NPS ≤ 2 1/2"
NPS ≥ 3"		1/16" max
Thickness	≤ 18"	+1/8", -0"
	≥ 20"	+3/16", -0"
Length Through the Hub	NPS ≤ 4"	±1/16"
	5 ≤ NPS ≤ 10"	+1/16", -1/8"
	≥ 12"	+1/8", -3/16"

WELDING BEVEL STANDARDS

for Wall Thickness "t" 3/16" to 3/4" incl.

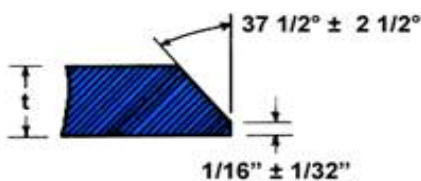

for Wall Thickness "t" greater than 3/4"

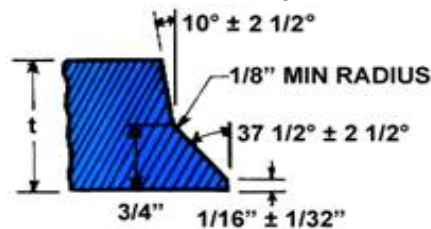

(1) Tolerances not listed in B16.5-2003